



12V, 75A Booster Battery Charger w/Wi-Fi

- 1) If you have not installed the 'Deltran Connected' app, go to the App Store, search for "Deltran Connected" and download the app.

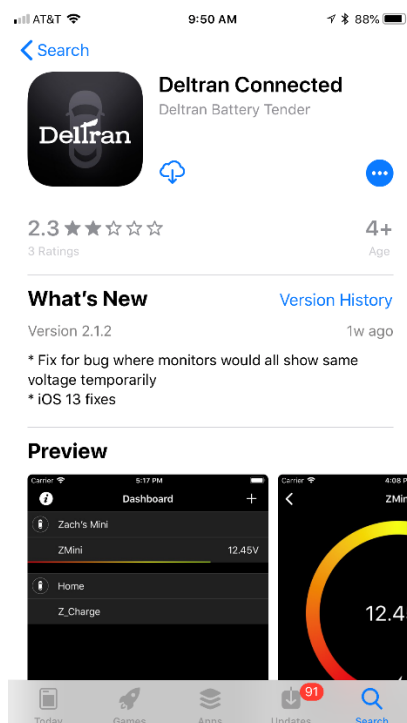


- 2) If you have the app already downloaded, then go to the App Store and make sure your app is up to date with the latest version.
- 3) Open the Deltran Connected app to get started.
- 4) Log in or Register
 - a) If you have created an account with the Battery Tender® app then you can sign in with the same username and password. Any device that you added to the Battery Tender® app will sync and appear in the 'Deltran Connected' app.
 - b) BatteryTender.com website accounts are not tied to the Battery Tender® app or the 'Deltran Connected' app. Please create a new account by tapping "New Account".

- 5) Once you are signed in, either tap on the + in the top right corner or on the center of the screen to begin connecting your Wireless Power Plus 75A Boost Charger.

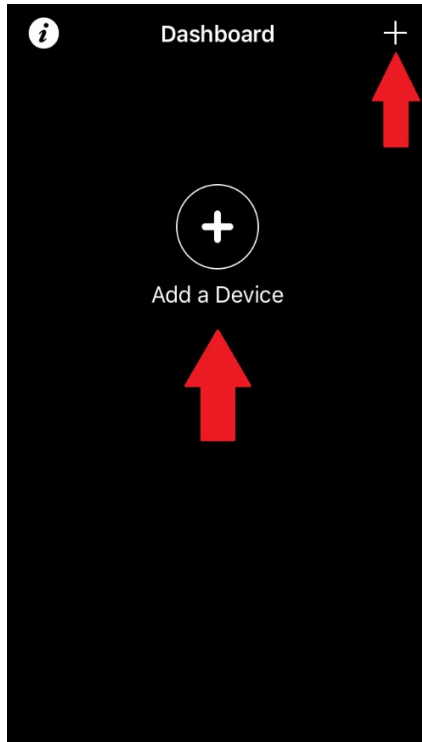


- a)
- 6) Plug in the Wireless Power Plus 75A Boost Charger if it isn't already. If it is plugged in, unplug it for 10 seconds and plug it back in.
- 7) Tap on "GO TO WI-FI SETTINGS" to start the configuration process.
 - a) If it doesn't already go to the Wi-Fi settings, tap on the Wi-Fi tab.
 - b) You should see a network name that will look like BT_XXXXXX if it hasn't already been configured in the Battery Tender app.
 - c) The default password is "12345678" without quotation marks.
 - d) If you are connecting to an already configured device, look for the network name it was configured with before.
- 8) Once you have selected the Wireless Power Plus 75A Boost Charger and you see the checkmark to the left, go back to the Deltran Connected app.

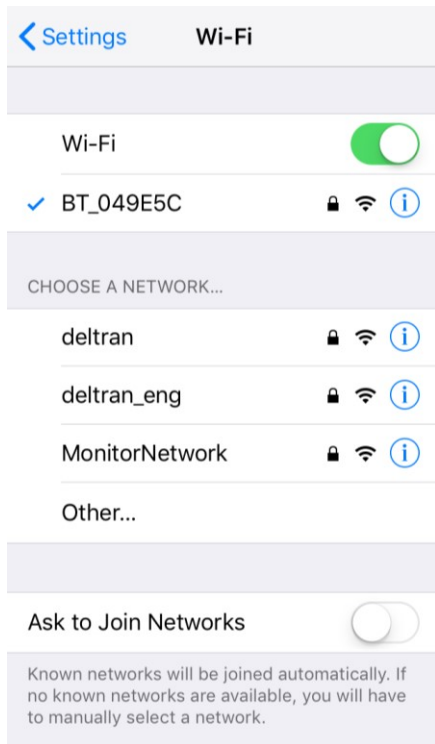

a)



- 9) You have the option to change the Wireless Power Plus 75A Boost Charger's name in this step.
- 10) Tap on "SETUP WI-FI CONNECTION" to pair the Wireless Power Plus 75A Boost Charger to your router.
 - a. If your wireless network wasn't already selected, tap on "SELECT ANOTHER NETWORK" at the bottom of the page.

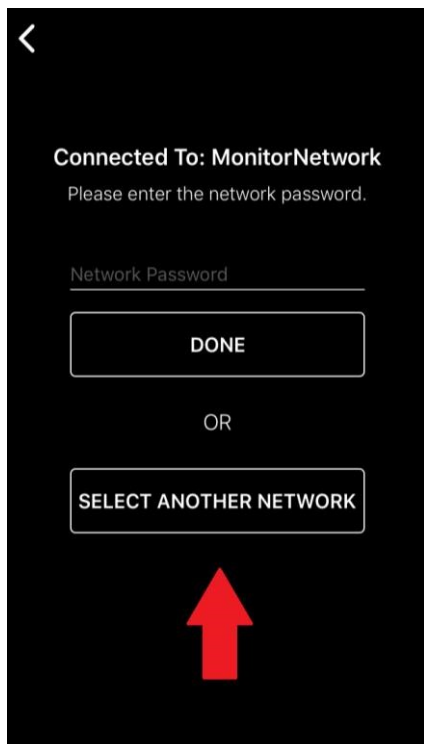

i.


- b. Select a **2.4GHz network** that the Wireless Power Plus 75A Boost Charger will connect to.
- c. Even if you see a 5GHz network signal, the Charger will not connect. A **2.4GHz network is required.**
- d. You will not be able to connect to a dual band router that has the same SSID (network name) for 2.4 and 5 GHz.
 - i. In this situation, the 5Ghz band must be disabled temporarily until set-up is complete.
- e. Connection strength will vary depending on the distance to your router and any obstructions through the path to the Wireless Power Plus 75A Boost Charger's location.

11) Now create or select an existing location for where the Wireless Power Plus 75A Boost Charger will be used.

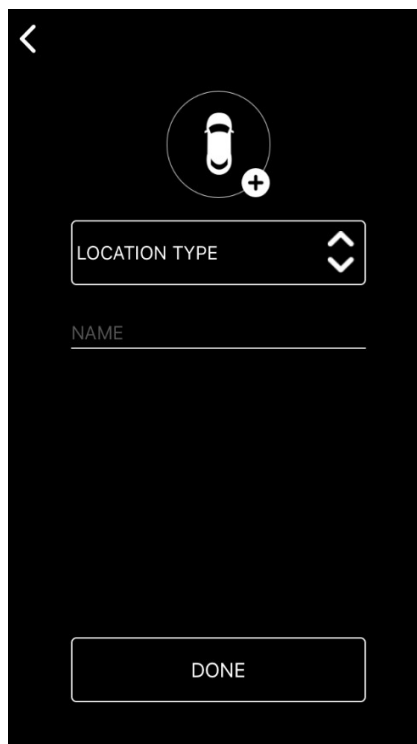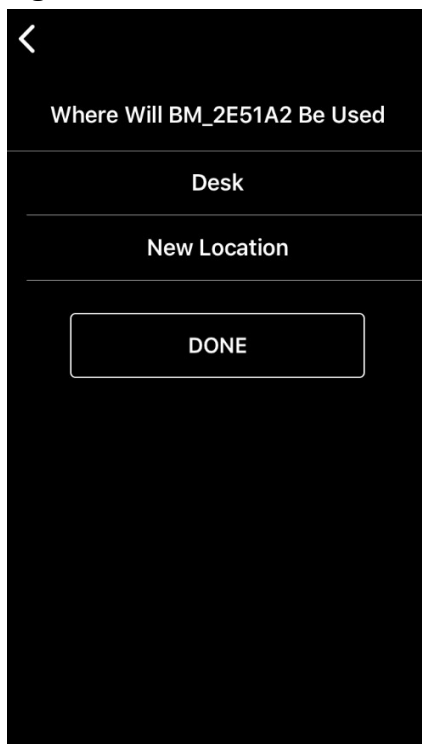


a)

12. You should now see the Battery tender on the dashboard screen. This is to indicate a successful connection to the selected wireless network in the prior step.
- a. Very rarely will the device fail to pair but hit cancel and wait one hour and you should see the status of your battery.
 - b. To remove the device, tap the three dots in the top-right corner of the Deltran Connected app and then tap."

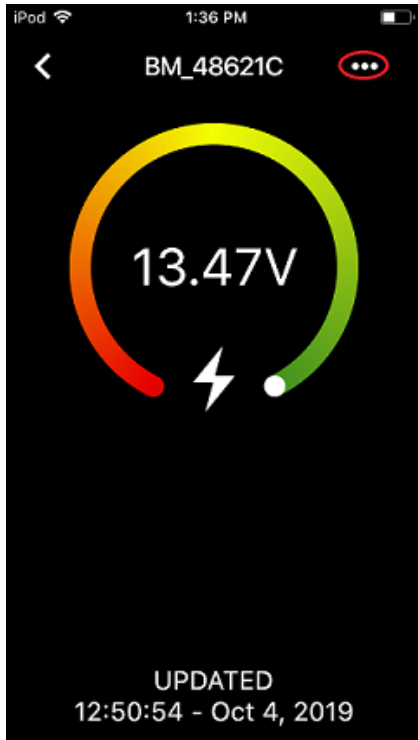

c. Repeat steps 5 – 15.

13. You should now see your Wireless Power Plus 75A Boost Charger on your Dashboard screen.

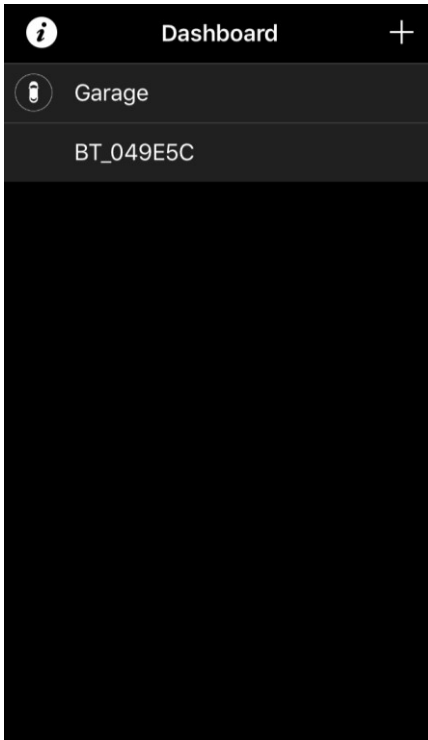

a.

