



1. Close the app completely if it is currently open.
2. Update the app from the Play Store if it is not the latest.
3. Reopen the app.
4. Make a new account or sign in to an already existing account that was created through the Battery Tender® app.
5. If the Power Plus™ is plugged in, please cycle power.
6. Use a paperclip or a paperclip-like object and press the reset button that is below the blue LED symbol and go through the onscreen setup of the Power Plus™ 75A.
7. Go to the connect page and tap “Add A Battery Tender®”
8. Connect to the Power Plus™.
 - a. Tap the Search Device bar and a list of Wi-Fi networks will populate.
 - b. Tap the name of your Power Plus™ (a default name will start with BT_ and then have a mix of letters and numbers).
 - c. The default password is “12345678” without quotation marks.
9. If you get the “Battery Tender Not Connected” message, please enable Airplane Mode and keep Wi-Fi turned on. Please repeat step 8 to try again.
10. You will see a “Congratulations” screen, now press continue.
11. You should see a screen like this but with the default name of your Power Plus™:

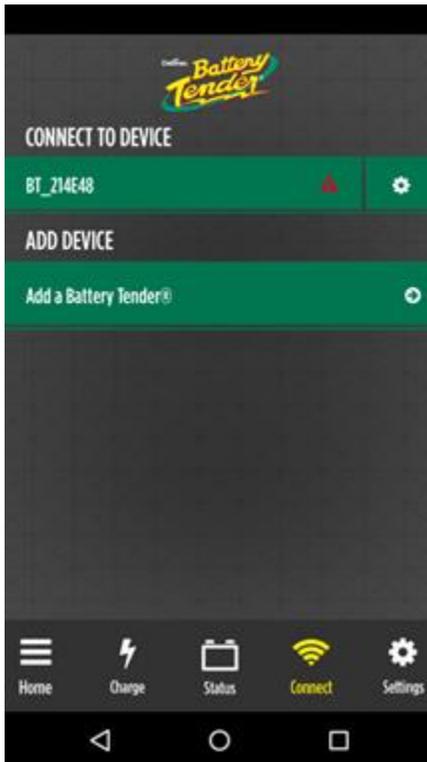

The red triangle indicates that you are connected directly to the Power Plus™.

12. Click the gear icon like in the picture to setup the Power Plus™ and connect it to a Wi-Fi network.

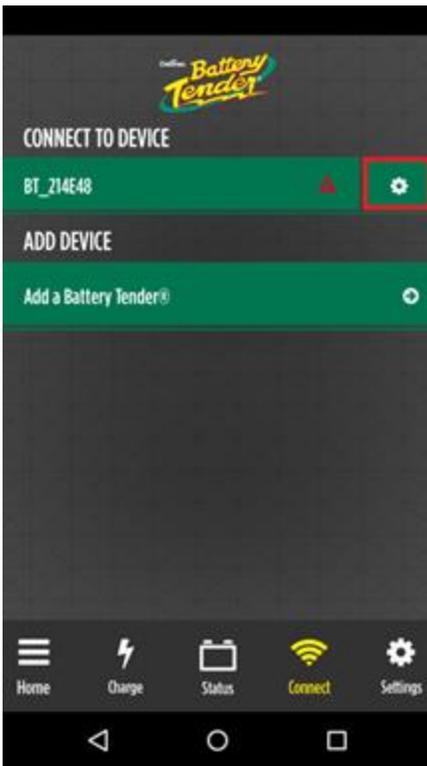

13. Setup the Power Plus™ with a name and password (the password must be at least 8 characters). When you get to the Wi-Fi Setup page like below, you will see a “Search for WiFi” field.




14. Tap the bar “Search For WiFi”
- Wait for the list to populate with the Wi-Fi network that you want the Power Plus™ to connect to.
 - The Power Plus™ can **ONLY connect to a 2.4GHz network**. Even if you see a 5GHz network in the list, the Power Plus™ will **NOT** connect to it.
 - Once you see your preferred network, tap it.
15. Once your preferred 2.4GHz network is selected, it will replace the “Search For WiFi” text.



16. Enter the password to your Wi-Fi network and hit next.

17. The red triangle should now not be visible.

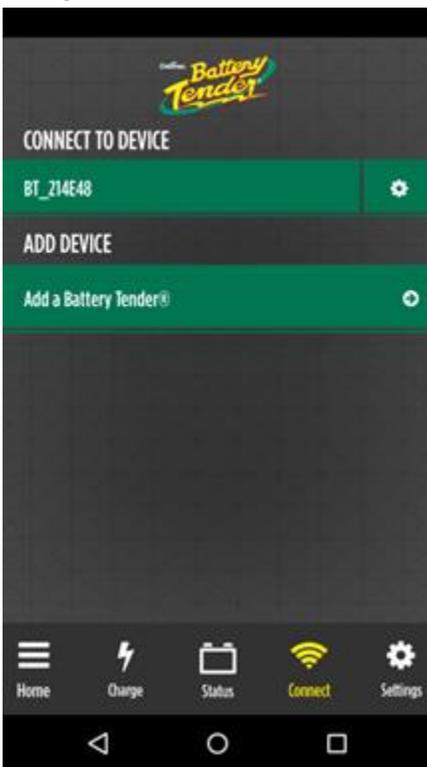

This indicates that the Power Plus™ is connected to the previously selected 2.4GHz network.