



1. Close the app completely if it is currently open (double click home button and swipe up on the app).
2. Update the app from the App Store if it is not the latest.
3. Reopen the app.
4. Make a new account or sign in to an already existing account that was created through the Battery Tender® app.
5. If the Power Plus™ is plugged in, please cycle power.
6. Use a paperclip or a paperclip-like object and press the reset button that is below the blue LED symbol and go through the onscreen setup of the Power Plus™ 75A.
7. Tap “Add A Battery Tender®”
8. Tap Continue.
9. Go to your Wi-Fi settings on your iPhone/iPad/iPod Touch and connect to your Power Plus™ (a default name will start with BT_ and then have a mix of letters and numbers).

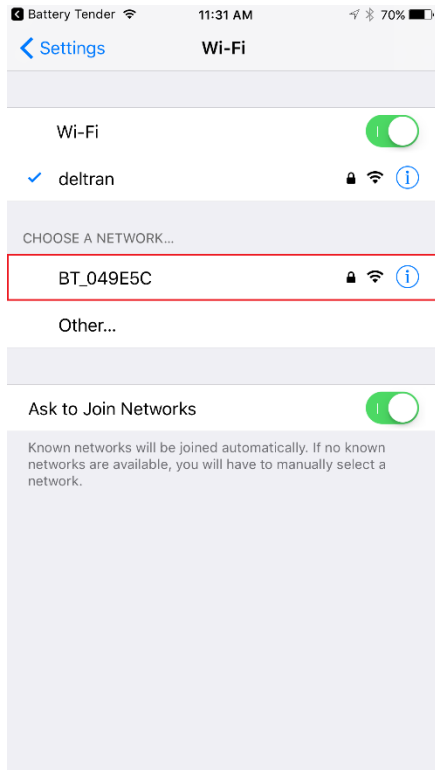


- a.
 - b. If the name has been changed in a previous setup, please connect to that device name.
 - c. The default password is “12345678” without quotation marks.
10. Go back to the app and you should see a screen like this but with the default name of your Power Plus™:

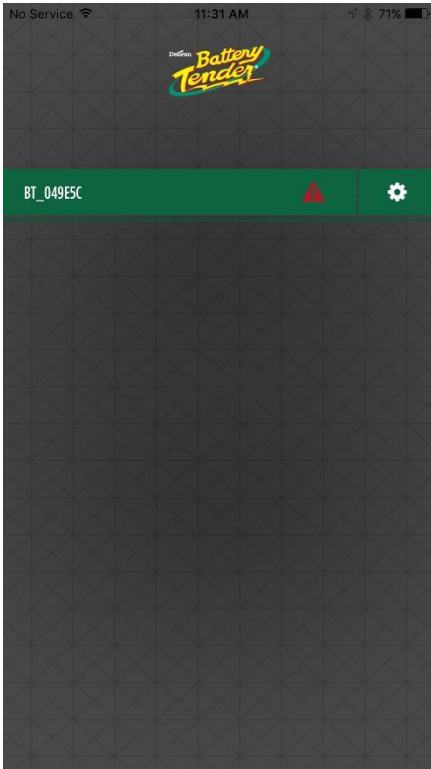


The red triangle indicates that you are connected directly to the Power Plus™.

11. Tap this settings icon to setup the Power Plus™ and connect it to a Wi-Fi network:

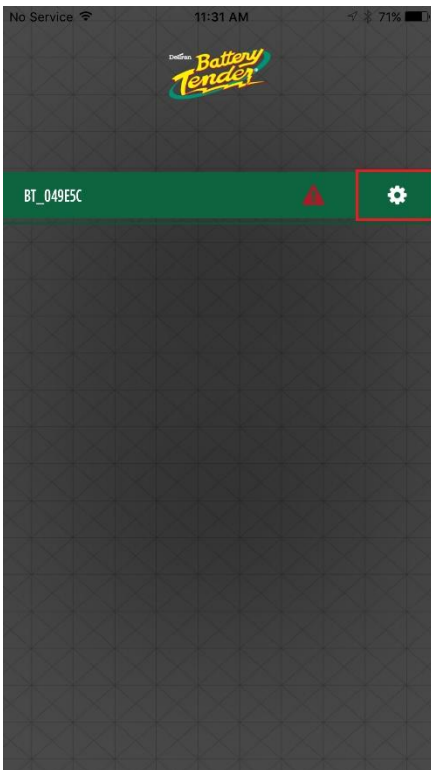


a.

12. Setup the Power Plus™ with a name and password (the password must be at least 8 characters). When you get to the Wi-Fi Setup page like below, you will see the name of the Power Plus™ in the select Wi-Fi field.

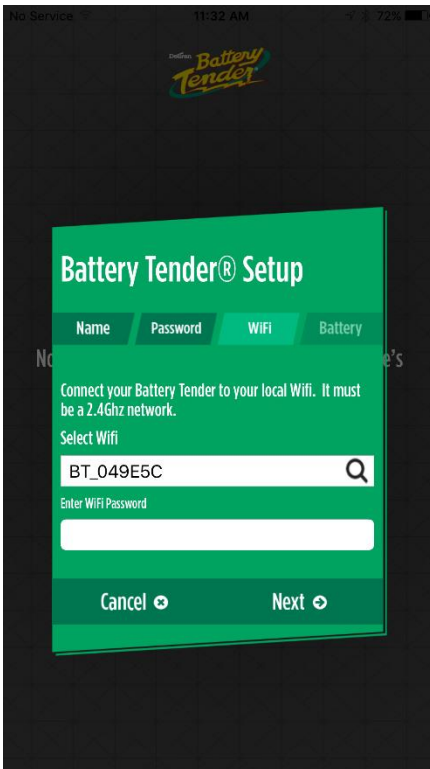

a.

13. Tap the bar with the name of the device and go back to your Wi-Fi settings on your iPhone/iPad/iPod Touch.

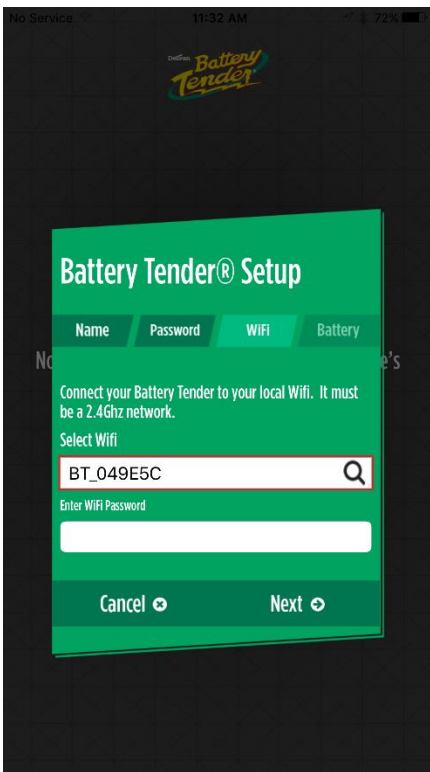


a.

14. Select a **2.4GHz network** that the Power Plus™ will connect to.

a. Even if you see a 5GHz network signal, the Power Plus™ will not connect. A **2.4GHz network** is **required**.


15. Go back to the app and the Select Wi-Fi field should prepopulate with the selected Wi-Fi network in the previous step like below.

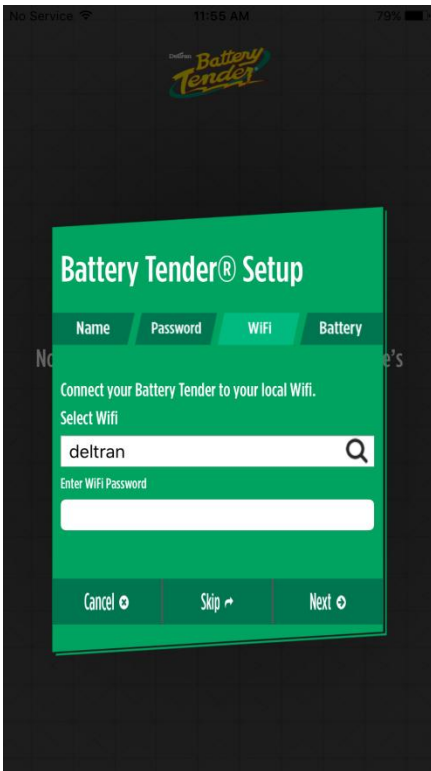

a.

16. Enter the password to your Wi-Fi network and hit next.

17. The red triangle should now not be visible.

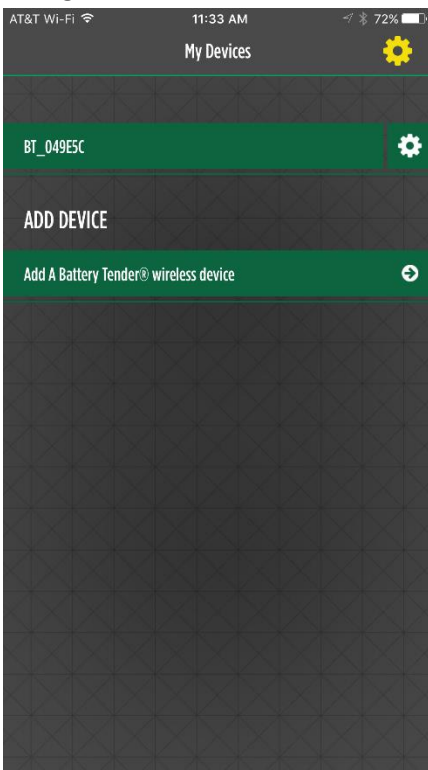

This indicates that the Power Plus™ is connected to the previously selected 2.4GHz network.